

PICTURES

DESCRIPTION

CERTIFICATION 02



FEATURES

UPPER:

super-lightweight water-repellent fabric

ANTI-SLIP ANTI-STATIC SOLE:

super comfortable ETPU midsole, FO+HRO nitrile rubber tread with high energy absorption.

REMOVABLE INSOLE:

Antistatic PU low density with ergonomic thermoforming.

LINING:

Breathable micro-perforated 3D fabric.

ANTI-PERFORATION INSOLE: NO

TOE CAP: NO

OUTSOLE



INSOLE




ANTI-SLIP ANTI-STATIC SOLE super comfortable ETPU midsole, FO+HRO nitrile rubber tread with high energy absorption.

REMOVABLE INSOLE Antistatic PU low density with ergonomic thermoforming.

USER MANUAL

 THE POWER OF PERFORMANCE MANUFACTURER'S INSTRUCTIONS AND INFORMATION LANGUAGES INDEX <table border="1"> <thead> <tr> <th>LANGUAGE</th> <th>CODE</th> <th>PAGE</th> </tr> </thead> <tbody> <tr> <td>ENGLISH</td> <td>EN</td> <td>2</td> </tr> <tr> <td>ITALIANO</td> <td>IT</td> <td>6</td> </tr> <tr> <td>ESPAÑOL</td> <td>ES</td> <td>10</td> </tr> <tr> <td>DEUTSCH</td> <td>DE</td> <td>14</td> </tr> <tr> <td>FRAANÇAIS</td> <td>FR</td> <td>18</td> </tr> </tbody> </table> MANUFACTURER'S INSTRUCTIONS AND INFORMATION SPARCOTEAMWORK.COM	LANGUAGE	CODE	PAGE	ENGLISH	EN	2	ITALIANO	IT	6	ESPAÑOL	ES	10	DEUTSCH	DE	14	FRAANÇAIS	FR	18	MANUFACTURER'S INSTRUCTIONS AND INFORMATION The following information is for the information only and does not provide the necessary team for the product and cannot be substituted by the manufacturer. The manufacturer assumes no responsibility for use of equipment and accessories of Sparco Teamwork. It is advised to consult the manufacturer for the correct use of the equipment and accessories. SPARCO S.p.A. Via L. Dini 1024 - 00198 ROMA (RM) - Italy - Tel. 06 57455152 The L2400 helmet complies with the European Directive 2001/43/CE (EN 13709:2002), EN 1078:2002, EN 1079:2002, EN 1080:2002, EN 1081:2002, EN 1082:2002, EN 1083:2002, EN 1084:2002, EN 1085:2002, EN 1086:2002, EN 1087:2002, EN 1088:2002, EN 1089:2002, EN 1090:2002, EN 1091:2002, EN 1092:2002, EN 1093:2002, EN 1094:2002, EN 1095:2002, EN 1096:2002, EN 1097:2002, EN 1098:2002, EN 1099:2002, EN 1100:2002, EN 1101:2002, EN 1102:2002, EN 1103:2002, EN 1104:2002, EN 1105:2002, EN 1106:2002, EN 1107:2002, EN 1108:2002, EN 1109:2002, EN 1110:2002, EN 1111:2002, EN 1112:2002, EN 1113:2002, EN 1114:2002, EN 1115:2002, EN 1116:2002, EN 1117:2002, EN 1118:2002, EN 1119:2002, EN 1120:2002, EN 1121:2002, EN 1122:2002, EN 1123:2002, EN 1124:2002, EN 1125:2002, EN 1126:2002, EN 1127:2002, EN 1128:2002, EN 1129:2002, EN 1130:2002, EN 1131:2002, EN 1132:2002, EN 1133:2002, EN 1134:2002, EN 1135:2002, EN 1136:2002, EN 1137:2002, EN 1138:2002, EN 1139:2002, EN 1140:2002, EN 1141:2002, EN 1142:2002, EN 1143:2002, EN 1144:2002, EN 1145:2002, EN 1146:2002, EN 1147:2002, EN 1148:2002, EN 1149:2002, EN 1150:2002, EN 1151:2002, EN 1152:2002, EN 1153:2002, EN 1154:2002, EN 1155:2002, EN 1156:2002, EN 1157:2002, EN 1158:2002, EN 1159:2002, EN 1160:2002, EN 1161:2002, EN 1162:2002, EN 1163:2002, EN 1164:2002, EN 1165:2002, EN 1166:2002, EN 1167:2002, EN 1168:2002, EN 1169:2002, EN 1170:2002, EN 1171:2002, EN 1172:2002, EN 1173:2002, EN 1174:2002, EN 1175:2002, EN 1176:2002, EN 1177:2002, EN 1178:2002, EN 1179:2002, EN 1180:2002, EN 1181:2002, EN 1182:2002, EN 1183:2002, EN 1184:2002, EN 1185:2002, EN 1186:2002, EN 1187:2002, EN 1188:2002, EN 1189:2002, EN 1190:2002, EN 1191:2002, EN 1192:2002, EN 1193:2002, EN 1194:2002, EN 1195:2002, EN 1196:2002, EN 1197:2002, EN 1198:2002, EN 1199:2002, EN 1200:2002, EN 1201:2002, EN 1202:2002, EN 1203:2002, EN 1204:2002, EN 1205:2002, EN 1206:2002, EN 1207:2002, EN 1208:2002, EN 1209:2002, EN 1210:2002, EN 1211:2002, EN 1212:2002, EN 1213:2002, EN 1214:2002, EN 1215:2002, EN 1216:2002, EN 1217:2002, EN 1218:2002, EN 1219:2002, EN 1220:2002, EN 1221:2002, EN 1222:2002, EN 1223:2002, EN 1224:2002, EN 1225:2002, EN 1226:2002, EN 1227:2002, EN 1228:2002, EN 1229:2002, EN 1230:2002, EN 1231:2002, EN 1232:2002, EN 1233:2002, EN 1234:2002, EN 1235:2002, EN 1236:2002, EN 1237:2002, EN 1238:2002, EN 1239:2002, EN 1240:2002, EN 1241:2002, EN 1242:2002, EN 1243:2002, EN 1244:2002, EN 1245:2002, EN 1246:2002, EN 1247:2002, EN 1248:2002, EN 1249:2002, EN 1250:2002, EN 1251:2002, EN 1252:2002, EN 1253:2002, EN 1254:2002, EN 1255:2002, EN 1256:2002, EN 1257:2002, EN 1258:2002, EN 1259:2002, EN 1260:2002, EN 1261:2002, EN 1262:2002, EN 1263:2002, EN 1264:2002, EN 1265:2002, EN 1266:2002, EN 1267:2002, EN 1268:2002, EN 1269:2002, EN 1270:2002, EN 1271:2002, EN 1272:2002, EN 1273:2002, EN 1274:2002, EN 1275:2002, EN 1276:2002, EN 1277:2002, EN 1278:2002, EN 1279:2002, EN 1280:2002, EN 1281:2002, EN 1282:2002, EN 1283:2002, EN 1284:2002, EN 1285:2002, EN 1286:2002, EN 1287:2002, EN 1288:2002, EN 1289:2002, EN 1290:2002, EN 1291:2002, EN 1292:2002, EN 1293:2002, EN 1294:2002, EN 1295:2002, EN 1296:2002, EN 1297:2002, EN 1298:2002, EN 1299:2002, EN 1300:2002, EN 1301:2002, EN 1302:2002, EN 1303:2002, EN 1304:2002, EN 1305:2002, EN 1306:2002, EN 1307:2002, EN 1308:2002, EN 1309:2002, EN 1310:2002, EN 1311:2002, EN 1312:2002, EN 1313:2002, EN 1314:2002, EN 1315:2002, EN 1316:2002, EN 1317:2002, EN 1318:2002, EN 1319:2002, EN 1320:2002, EN 1321:2002, EN 1322:2002, EN 1323:2002, EN 1324:2002, EN 1325:2002, EN 1326:2002, EN 1327:2002, EN 1328:2002, EN 1329:2002, EN 1330:2002, EN 1331:2002, EN 1332:2002, EN 1333:2002, EN 1334:2002, EN 1335:2002, EN 1336:2002, EN 1337:2002, EN 1338:2002, EN 1339:2002, EN 1340:2002, EN 1341:2002, EN 1342:2002, EN 1343:2002, EN 1344:2002, EN 1345:2002, EN 1346:2002, EN 1347:2002, EN 1348:2002, EN 1349:2002, EN 1350:2002, EN 1351:2002, EN 1352:2002, EN 1353:2002, EN 1354:2002, EN 1355:2002, EN 1356:2002, EN 1357:2002, EN 1358:2002, EN 1359:2002, EN 1360:2002, EN 1361:2002, EN 1362:2002, EN 1363:2002, EN 1364:2002, EN 1365:2002, EN 1366:2002, EN 1367:2002, EN 136
LANGUAGE	CODE	PAGE																	
ENGLISH	EN	2																	
ITALIANO	IT	6																	
ESPAÑOL	ES	10																	
DEUTSCH	DE	14																	
FRAANÇAIS	FR	18																	

LABELS




COMPOSITION LABEL
onto the lining (inside the
right shoe) or onto the outsole



INTERNAL TONGUE LABEL
onto the lining inside
Size 50 x 15 mm

PACKAGING

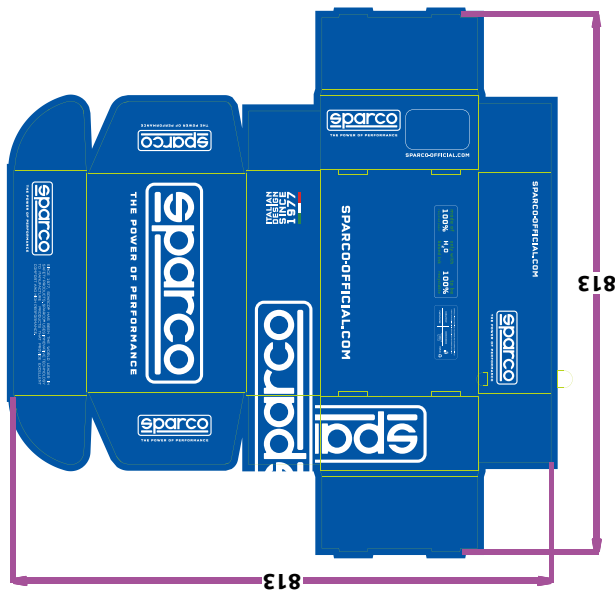

SPARCO BOX
in cardboard blue-white
and protective inner tissue paper
Size 34.5*20*12cm / 10 PR5/CTN



SHOE-BOX LABEL reporting product's features, certification,
batch number, code, QR-code and Barcode.
Size. 105x60 mm